


# Trimod Besta

Trimod Besta Füllstandscharter

Trimod Besta Level Switch

Trimod Besta Contrôleur de niveau

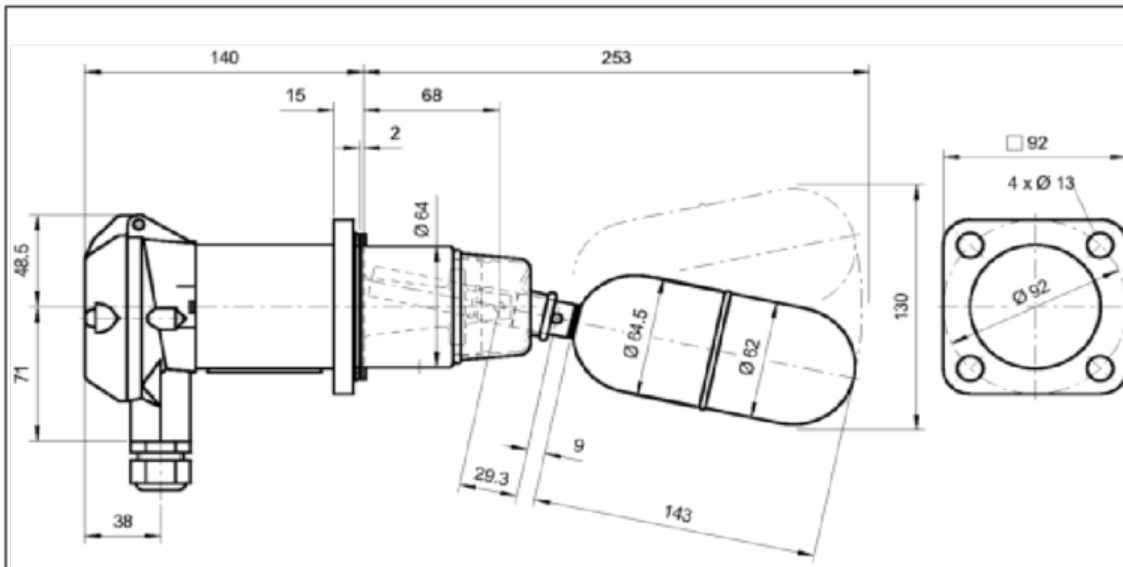

Gasket Ø77.64x2 Blue Gard 3000

Typ Type Type	A 01 051 (Art. no. A415606)	Schaltmodul Switch module Module de commande	A	Flanschmodul Flange module Module de bride	01	Schwimmermodul Float module Module de flotteur	051
Betriebstemperatur Operating temp. Temp. de service	0 to 120°C	Gehäusematerial Housing material Matériau boîtier	Aluminium Sea water resistant	Nenndruck / -weite Nom. Pressure / -Diameter Pression - / Section Nominal	PN 25	Schaltendifferenz Operating diff. Différentiel	12 mm
Umgebungstemp. Ambient temp. Temp. d'ambiance	0 to 70°C	Kabeleinführung Cable entry Presse-étoupe	M20 x 1.5	Norm Standard Norme	Besta	Dichte min. Densty min. Densité min.	0.750 kg/dm <sup>3</sup>
Schaltleistung Switch rating Pouvoir de coupure	5A / 250VAC 5A / 30VDC	Schutzart Enclosure Cl. de protection	IP65	Dichtungsart Flange Facing Type d'étanchéité	Raised face	Nenn- / Prüfdruck Nominal / Test press. Pression nominal / d'épreuve	PN 25 bar PP 38 bar

Safety Integrity Level:	<b>SIL 1</b> (SIL 3 capable)
Dimensionen / Dimensions mm	
Ship register certificate:	ABS, BV, DNV-GL, LR, RINA, RS, ClassNK
Überwurflansch Slip-on flange	--
Bride fixe	
Schmetze / Heat no:	
Bachofen-Nr. / Bachofen no:	
Dichtheinheit / Fixflansch Sealing unit / Fixed flange Unité d'étanchéité / Bride fixe	1.4408
Schmetze / Heat no:	
Bachofen-Nr. / Bachofen no:	
Schwimmer / Balg Float / Bellow Flotteur / Soufflet	1.4571 Perbunan
Order no.	
Stk. / pcs./quant.	
Date/Visa	10.07.18 / SIA

**BACHOFEN**  
INDUSTRIAL AUTOMATION

Bachofen AG, Ackerstrasse 42  
CH-8610 Uster/Switzerland  
Phone +41 44 944 11 11  
Fax +41 44 944 12 33  
info@trimodbesta.com  
www.trimodbesta.com

011015/TSI